

Ultrafast initialization and QND-readout of a spin qubit via control of nanodot-vacuum coupling

Ren-Bao Liu, Wang Yao, and L. J. Sham

Department of Physics, University of California San Diego, La Jolla, California 92093-0319

(Dated: February 2, 2008)

Ultrafast initialization enables fault-tolerant processing of quantum information while QND readout enables scalable quantum computation. By spatially assembling photon resonators and waveguides around an n-doped nanodot and by temporally designing optical pump pulses, an efficient quantum pathway can be established from an electron spin to a charged exciton to a cavity photon and finally to a flying photon in the waveguide. Such control of vacuum-nanodot coupling can be exploited for ultrafast initialization and QND readout of the spin, which are particularly compatible with the optically driven spin quantum computers.

PACS numbers: 78.67.Hc, 03.67.Lx, 42.50.Pq, 78.47.+p

Vacuum electromagnetic (EM) fluctuation plays an important role in quantum dynamics of nuclei [1], atoms [2], electrons [3], and solid-state quantum structures [4]. Recent advances in optical micro-structures, such as microspheres [5, 6], micro-rings [7, 8], micro-pillars [9], and engineered defects in photonic crystals [10], offer an opportunity of modifying the vacuum EM environment of various systems with a great extent of controllability. Novel ideas have been demonstrated such as engineering the Casimir force in microelectromechanical systems [11] and assembling semiconductor quantum dots inside photon resonators for efficient single photon sources [9]. At the same time, modern technology in ultrafast optics allows almost arbitrary design of laser pulses for coherent control [12]. Optical control of excitons in quantum dots has become one of the methods for building solid-state processors of quantum information [13, 14, 15].

Possessing ultra-long coherence time, electron spins in quantum dots are among the top candidates for quantum computing [16, 17]. Recent advances in quantum optics experiments have encouraged the proposals of optical manipulation of spins on the picosecond scale. In particular, Raman process [15] and optical RKKY interaction [14] mediated by charged excitons have been proposed for single-spin and two-spin operations, respectively, which constitute a set of gates for universal quantum computing. To make quantum computing complete, reading (measurement) and writing (initialization) of the qubits are two basic steps. Because the direct coupling between spins and their EM environment is extremely weak (which favors the long coherence time), spin readout has been a formidable task under investigation [18, 19, 20, 21, 22, 23, 24]. In most existing schemes [18, 19, 20, 21, 22], the spin state is first mapped into an orbit state which is then detected by electric sensors. These readout schemes, limited by the clock speed of the electric measurement and/or requiring local magnetic control, is not ideally suited for optically operated spin quantum computers. The ultrafast initialization of an individual qubit is essential in quantum error correction

and fault-tolerant quantum computing [25], for the error (entropy) has to be erased as it is generated during processing [26]. Much less attention has been paid to the speed of initialization [22] than its importance would suggest.

Quantum non-demolition (QND) measurements enable scalable quantum computing in the presence of less than ideal detector efficiency. By contrast, ensemble measurements for scalable computation may be problematic [27]. In a large fraction of currently known quantum algorithms, especially the seminal Shor's algorithm for factorization [28] and its relatives, while the terminal state is a superposition of the qubit basis states $\sum_x C_x |x\rangle$ (x denotes an N -bit binary number), exponential speedup over the classical algorithms depends on the information retrieval by a single measurement resulting in the projection into a computational basis state. However, implementation of one-shot measurement is difficult. In practice, a readout scheme may suffer from detection inefficiency which may be remedied by repeating the read cycle to gain sufficient accuracy. In a QND readout, a state collapses into a certain state $|x\rangle$ after the first reading cycle and remains in this state for the repeated cycles, so a multi-shot measurement just gives the same result as a single-shot measurement with 100% efficiency. On the contrary, if the readout is destructive, the entire algorithm has to be rewound from the very beginning, resulting in an ensemble of resultant states $|x\rangle$ after readout. If the ensemble measurement is an uncorrelated one (i.e., the different qubits are independently measured), it cannot distinguish different superposition states, e.g., the two states $|0000\rangle + |0011\rangle + |0110\rangle + |1001\rangle + |1100\rangle + |1111\rangle$ and $|0000\rangle + |0101\rangle + |1010\rangle + |1111\rangle$. Or if the readout is a correlated measurement with coincidence counting, the number of counting channels is of the order of 2^N .

In this letter, we propose a scheme of controlling the coupling between a nanodot and its EM environment both in space and in time to effect an ultrafast initialization and a QND readout of the qubit represented by an electron spin in a single nanodot. The basic idea is

depicted in Fig. 1. A high-quality microsphere (with Q-factor as high as $10^6 \sim 10^8$) [6] attached to a nanodot dramatically modifies the EM vacuum in the vicinity of the dot via the coupling between the evanescent wave of the resonance modes in the cavity and the electronic transitions in the dot. A tapered fiber coupled to the microsphere [5] acts as a quantum channel into which a photon stored in the cavity can escape rapidly. The spin qubit in the nanodot is controlled by the Raman processes [15] via the electron-trion transitions which may be detuned far off-resonance from the cavity modes so that the quantum channel cannot act as a source of decoherence. When the nanodot-cavity coupling is desired, the trion transitions and the cavity modes may be brought into resonance by the AC Stark effect of a laser light on the structure, during which time, a tipping pulse flips the electron state to a trion state which, in combination with the cavity mode, relaxes back rapidly by spontaneously emitting a photon into the quantum channel. A choice of the polarization of the tipping pulse can either (1) transfer the entropy of the spin to the photon qubit in the quantum channel, thus setting the spin qubit in a basis state, or (2) entangle the spin qubit with a photon qubit in the quantum channel, thus enabling the readout of the spin qubit via the photon detection. While optical pumping and spontaneous emission have been proposed for spin readout and initialization [24], our computation suggests that the spatial-temporal engineering of nanodot-vacuum coupling proposed here increases the efficiency by several orders of magnitude, leading to ultrafast initialization and QND-readout which are suitable for, respectively, fault-tolerant and scalable quantum computing.

The detailed optical processes of writing a spin qubit are illustrated in Fig. 2 (a). Without loss of generality, we assume that the doped electron is initially in an unpolarized state, i.e., $\hat{\rho}(-\infty) = 0.5|-\rangle\langle-| + 0.5|+\rangle\langle+|$, where $|\pm\rangle$ are the two spin states split by a strong magnetic field applied in the x -direction. The two degenerate trion states $|T\pm\rangle$ can be excited from $|\mp\rangle$ or $|\pm\rangle$ by a X - or Y -polarized pulses, respectively [29]. The evanescent wave of a relevant whispering-gallery-mode in the

cavity is X -polarized in the vicinity of the nanodot, so that when brought within resonance by the AC Stark pulse, the trion states $|T\pm\rangle$ and the cavity states $|\mp, C\rangle$ are coupled into two split trion-polariton states, respectively. A writing cycle consists of four basic steps: (1) An X -polarized AC Stark pulse is adiabatically switched on, bringing the states $|T+\rangle$ and $|- , C\rangle$ into resonance; (2) A tipping pulse with Y -polarization flips the spin up state $|+\rangle$ to the polariton states formed by $|T+\rangle$ and $|- , C\rangle$; (3) The polariton states relax to the spin down state $|-\rangle$ rapidly by emitting a photon into the tapered fiber, dissipating the entropy of the system to the EM environment; (4) The AC Stark pulse is adiabatically switched off. Ideally, after the writing cycle, the spin is fully polarized, i.e., $\hat{\rho} = |-\rangle\langle-|$ and the entropy (or the quantum information if the electron is initially in a pure state) of the spin is mapped into the quantum channel.

We tested the fidelity and duration of the writing process by simulating the master equation of the system with realistic parameters given in the caption of Fig. 2. Fig. 2 (c) shows that a single writing cycle completed within 80 ps produces an almost 100% polarized spin from a maximally mixed state. The density matrix at the end of the cycle is $\hat{\rho} = 0.9945|-\rangle\langle-| + 0.0040|+\rangle\langle+| + \hat{\rho}_{\text{err}}$, where $\hat{\rho}_{\text{err}}$ is the probability ($\approx 0.15\%$) of the system remaining in the trion states. The simulation included reasonable estimates of the decay of the trion and the cavity modes by emitting photons into free-space EM modes. Depending on the polarization of the emitted free-space photon, the trion state relaxes to different spin states, which is the main source of the writing error ($\approx 0.4\%$). The multi-photon cavity states were included in the numerical calculation, as they renormalize the AC Stark shift (the real excitation of multi-photon states is negligible due to the off-resonance condition). Inclusion of up to 3-photon states was found sufficient to obtain converged results.

The temporal control of the nanodot-vacuum coupling is provided by the designed shaping of the pump and tipping pulses. The X -polarized AC Stark pulse has an almost-square profile as

$$\chi_p(t) = \chi_p e^{-i\Omega_p t} [\text{erf}(\sigma_p(t - t_1)) - \text{erf}(\sigma_p(t - t_2))],$$

[see Fig. 2 (b)]. The spectral width ($\sigma_p = 0.354$ meV) is set much smaller than the detuning (Ω_p is 5.5 meV below the $|-\rangle \rightarrow |T+\rangle$ transition), so that the effect due to non-adiabatic switch-on and off is negligible (the error $< 0.15\%$). For the parameters in Fig. 2, the trion state $|T+\rangle$ and the cavity state $|- , C\rangle$ are brought into resonance when the pump strength ($2\chi_p$) reaches the value 1.21 meV. As the pump pulse maintains the resonant cavity-dot tunnelling which facilitates the photon escape to the quantum channel, the trion state relaxes very fast (on the time-scale of 10 ps). A duration of the pump pulse $t_2 - t_1 = 70$ ps is found sufficient for the total dissipation of the photon. The tipping pulse ideally should

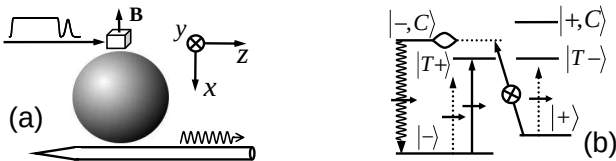


FIG. 1: (a) Physical structure of the coupling system of a doped nanodot, a microsphere, and a tapered fiber. (b) Basic optical processes for reading and writing a spin state. The dotted arrows represent the AC Stark-pulses, the solid arrows with X or Y polarization represent the tipping pulse for writing or reading, respectively, and the wavy arrow represents the spontaneous emission.

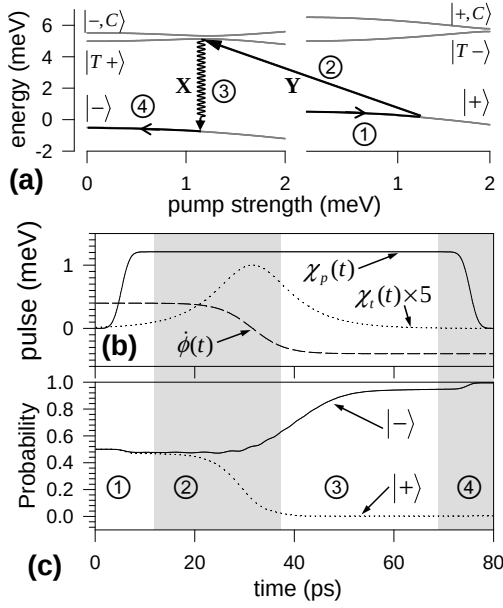


FIG. 2: (a) Detailed optical process for spin initialization. The grey curves are the energies of different states versus the Rabi frequency of the AC Stark pulse. The energies of the cavity modes and the trion states are measured from the central frequency of the AC Stark pulse. (b) The Rabi frequencies of the AC Stark pulse and the tipping pulse (amplified by a factor 5), and the sweeping frequency of the tipping pulse. (c) Probabilities of spin down and up. Different steps of the writing cycle, indicated by ①-④, are distinguished by shadowed areas in (b) and (c). The parameters used are as follows: The Zeeman splitting of the spin $\omega_c = 1$ meV, the cavity-trion coupling $g_{\text{cav}} = 0.1$ meV, the cavity-fiber coupling $\gamma = 0.2$ meV, the detuning of the cavity state $|-,C\rangle$ from the trion state $|T+\rangle$ is $\Delta = 0.5$ meV, the damping rate of trions $\Gamma = 1$ μeV , the cavity-free space loss rate $\gamma' = 0.045$ μeV (corresponding to $Q \sim 3 \times 10^7$), and the dipole matrix element of the cavity mode is 0.3 times that of the trion state.

be a π -pulse for Rabi-oscillation between $|+\rangle$ and $|T+\rangle$. Due to the dynamical nature of the states (dressed by the AC Stark pulse) and the rather small polariton splitting (~ 0.1 meV), a perfect π -rotation requires an extremely long pulse. The solution is to shape a chirped pulse as $\chi_t(t) = \chi_t e^{-i\phi(t) - i\Omega_t t} \text{sech}(\sigma_t(t - t_t))$ with the phase sweeping rate $\dot{\phi}(t) = -\sigma_c \tanh(\sigma_t(t - t_t))$ [12]. The frequency of the pulse now will sweep from σ_c above Ω_t to σ_c below. When the central frequency Ω_t is tuned in between the split polaritons and the sweeping range covers both states, the initial spin state $|+\rangle$ will be left adiabatically in a superposition of the two polariton states, both of which relax rapidly to the target spin state $|-\rangle$. In simulation, the tipping pulse, with frequency sweeping range $\sigma_c = 0.4$ meV, strength $\chi_t = 0.2$ meV, and duration $1/\sigma_t = 6.58$ ps, flips the spin state $|+\rangle$ to the polariton states with negligible error.

A mere switch of the polarizations of the tipping and

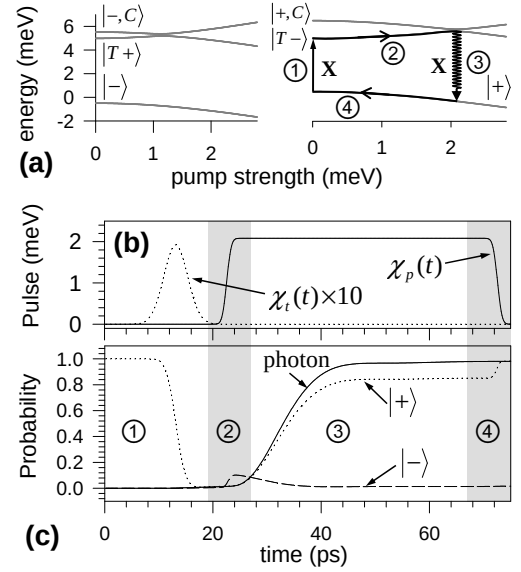


FIG. 3: (a) Detailed optical process for spin readout. (b) The Rabi frequencies of the AC Stark pulse and the tipping pulse (amplified by a factor 10). (c) Probabilities of spin down, spin up, and photon emission, for a spin initially polarized up. Different steps of the reading cycle, indicated by ①-④, are distinguished by shadowed areas in (b) and (c). The parameters are the same as in Fig. 2.

pump pulses from (Y, X) to (X, Y), respectively, changes the “write” operation to a “read” one. The reading cycle, as illustrated by Fig. 3 (a), includes four basic steps: (1) An X-polarized tipping pulse flips the spin state $|+\rangle$ to the trion state $|T-\rangle$; (2) A Y-polarized AC Stark pulse adiabatically switched on drives the trion state into resonance with the cavity state $|+,C\rangle$; (3) The trion state resonantly tunnels into the cavity state and relaxes rapidly back to the spin state $|+\rangle$, leaving a photon emitted into the quantum channel; (4) The AC Stark pulse is adiabatically switched off. Suppose that the spin state to be read is $\alpha|+\rangle + \beta|-\rangle$ and the channel is initially in the vacuum state $|0\rangle$. The read process will ideally transform the system into the entangled state $\alpha|+\rangle|1\rangle + \beta|-\rangle|0\rangle$ (where $|1\rangle$ denotes the photon wave packet emitted into the fiber), so the spin state can be read out by measuring the photon number state with a photon detector. The photon counting doesn’t disturb a spin eigenstate, providing a QND measurement of the spin.

Note that the pulse timing for reading is different from that for writing [see Fig. 3 (b)]. The reading sequence has been designed to minimize the real excitation of the multi-photon states, while the writing sequence has been designed to minimize the emission of free-space photons by the trion states. In reading, the Rabi flip process is between steady states and the transition is well separated from the others, the pulse-shaping trick is unnecessary, so the tipping pulse is assumed the simple Gaussian form

$\chi_t(t) = \chi_t e^{-\sigma_t^2(t-t_t)^2/2 - i\Omega_t t}$ with optical area equal π . The AC Stark pulse is chosen Y -polarized to avoid direct excitation of the cavity mode.

The reading cycle has been numerically simulated for the same structure as in Fig. 2. The tipping and the AC Stark pulses are set such that $1/\sigma_t = 2.19$ ps, $\chi_t = 0.192$ meV, Ω_t is in resonant with the $|+\rangle \rightarrow |T-\rangle$ transition, $\sigma_p = 0.707$ meV, $2\chi_p = 2.08$ meV, Ω_p is 5.5 meV below the $|-\rangle \rightarrow |T-\rangle$ transition, and the duration of the pump pulse is $t_2 - t_1 = 50$ ps. After a single cycle of reading, an initial state $\hat{\rho}_0 = |+\rangle\langle+|$ results in the final state $\hat{\rho}_1 = 0.0161|-\rangle\langle-| + 0.9824|+\rangle\langle+| + \hat{\rho}_{\text{err}}$ with probability 0.9806 of having a photon emitted into the quantum channel [see Fig. 3 (c)], while an initial state $\hat{\rho}_0 = |-\rangle\langle-|$ results in the final state $\hat{\rho}_1 = 0.9955|-\rangle\langle-| + 0.0040|+\rangle\langle+| + \hat{\rho}_{\text{err}}$ with probability 0.0015 of having a photon emitted into the quantum channel (not shown). The photon emitted into the fiber can be detected with high efficiency [30]. If the detector has zero dark-count rate and efficiency of 50%, the POVM operators for the reading process are defined as $\hat{P}_- \equiv 0.9992|-\rangle\langle-| + 0.5097|+\rangle\langle+|$ and $\hat{P}_+ \equiv 0.0008|-\rangle\langle-| + 0.4903|+\rangle\langle+|$. Within 5 reading cycles, the spin state can be read out with accuracy higher than 97%, and the back-action noise to the spin is less than 10%, while the time duration is less than 0.4 ns, much shorter than the spin decoherence time.

In summary, the coupling between the EM vacuum and nanodots can be customized both by spatially assembling micro-resonators and quantum channels in the vicinity of the dot and by temporal design of the control optical pulses. Such a control can be employed for ultrafast initialization and QND readout of a single electron spin in a doped nanodot. The readout and initialization schemes, proposed here for a specific fiber-microsphere structure, can be implemented in alternative systems such as etched waveguide-resonator structures on semiconductor surfaces [7, 8] and line- and point-defects engineered in photonic crystals [10]. Though high- Q cavity has been assumed in numerical simulations of the initialization and readout operations, efficiency reduction resulting from lower Q values can be tolerated by recycling the operations for a few times. The schemes proposed here may also be adapted to monitor and control the spin state of a single molecule adsorbed to a cavity-fiber structure [31].

This work was supported by ARDA/ARO DAAD19-02-1-0183, NSF DMR-0099572, and QuIST/AFOSR F49620-01-1-0497.

-
- [1] E. M. Purcell, Phys. Rev. **69**, 681 (1946).
 [2] W. E. Lamb, Jr., Rep. Progr. Phys. **14**, 19 (1951).

- [3] G. Gabrielse and H. Dehmelt, Phys. Rev. Lett. **55**, 67 (1985).
 [4] E. Yablonovitch, Phys. Rev. Lett. **58**, 2059 (1987).
 [5] S. M. Spillane, T. J. Kippenberg, O. J. Painter, and K. J. Vahala, Phys. Rev. Lett. **91**, 043902 (2003).
 [6] X. D. Fan, P. Palinginis, S. Lacey, H. L. Wang, and M. C. Lonergan, Opt. Lett. **25**, 1600 (2000).
 [7] D. K. Armani, T. J. Kippenberg, S. M. Spillane, and K. J. Vahala, Nature **421**, 925 (2003).
 [8] S. C. Hagness, S. T. Ho, and A. Taflov, J. Lightwave Technology **15**, 2154 (1997).
 [9] M. Pelton, C. Santori, J. Vučković, B. Zhang, G. S. Solomon, J. Plant, and Y. Yamamoto, Phys. Rev. Lett. **89**, 233602 (2002).
 [10] Y. Akahane, T. Asano, B.-S. Song, and S. Noda, Nature **425**, 944 (2003).
 [11] H. B. Chan, V. A. Aksyuk, R. N. Kleiman, D. J. Bishop, and F. Capasso, Science **291**, 1941 (2001).
 [12] D. Goswami, Phys. Report **374**, 385 (2003).
 [13] X. Li, Y. Wu, D. Steel, D. Gammon, T. H. Stievater, D. Katzer, D. S. Park, C. Piermarocchi, and L. J. Sham, Science **301**, 809 (2003).
 [14] C. Piermarocchi, P. Chen, L. J. Sham, and D. G. Steel, Phys. Rev. Lett. **89**, 167402 (2002).
 [15] P. Chen, C. Piermarocchi, L. J. Sham, D. Gammon, and D. G. Steel, Phys. Rev. B **69**, 075320 (2003).
 [16] D. Loss and D. P. DiVincenzo, Phys. Rev. A **57**, 120 (1998).
 [17] A. Imamoglu, D. D. Awschalom, G. Burkard, D. P. DiVincenzo, D. Loss, M. Sherwin, and A. Small, Phys. Rev. Lett. **83**, 4204 (1999).
 [18] M. Xiao, I. Martin, E. Yablonovitch, and H. W. Jiang, Nature **430**, 435 (2004).
 [19] H.-A. Engel, V. Golovach, D. Loss, L. M. K. Vandersypen, J. M. Elzerman, R. Hanson, and L. P. Kouwenhoven, cond-mat/0309023 (2003).
 [20] R. Ioniciou and A. E. Poescu, quant-ph/0310047 (2003).
 [21] J. M. Elzerman, R. Hanson, L. H. W. van Beveren, B. Witkamp, L. M. K. Vandersypen, and L. P. Kouwenhoven, Nature **430**, 431 (2004).
 [22] M. Friesen, C. Tahan, R. Joynt, and M. A. Eriksson, Phys. Rev. Lett. **92**, 037901 (2004).
 [23] F. Jelezko, T. Gaebel, I. Popa, A. Gruber, and J. Wrachtrup, Phys. Rev. Lett. **92**, 076401 (2004).
 [24] A. Shabaev, A. L. Efros, D. Gammon, and I. A. Merkulov, Phys. Rev. B **68**, 201305(R) (2003).
 [25] P. W. Shor, in *Proceedings of the 37th Annual Symposium on Foundations of Computer Sciences* (IEEE press, Burlington, Vermont, 1996), pp. 56–65.
 [26] D. DiVincenzo, Fortschr. Der Physik **48**, 771 (2000).
 [27] R.-B. Liu *et al.*, unpublished (2004).
 [28] P. W. Shor, in *Proceedings of the 35th Annual Symposium on Foundations of Computer Sciences*, edited by E. S. Goldwasser (IEEE press, Los Alamitos, California, 1994), pp. 124–134.
 [29] W. Yao, R. B. Liu, and L. J. Sham, Phys. Rev. Lett. **92**, 217402 (2004).
 [30] S. Takeuchi, J. Kim, Y. Yamamoto, and H. H. Hogue, Appl. Phys. Lett. **74**, 1063 (1999).
 [31] J. Wrachtrup, C. von Borczyskowski, J. Bernard, M. Orrit, and R. Brown, Nature **363**, 244 (1993).